


# DBX-57. USER MANUAL

## Getting Started:

Parent unit:


- ① Take off the belt-clip by sliding it downwards.
- ② Open the battery compartment by sliding the battery cover downwards and off.
- ③ Place the two included rechargeable batteries into the battery compartment. Ensure that the positive and negative poles of the battery (+ and -) coincide with the (+ and -) signs in the battery compartment.
- ④ Reattach the battery compartment cover and the belt-clip onto the parent-unit.
- ⑤ Insert the small plug of one of the included power adapters into the right side of the parent unit connector labelled DC 5V. Connect the other end of the power adapter to a 230V electrical outlet. The parent unit is now ready to use.

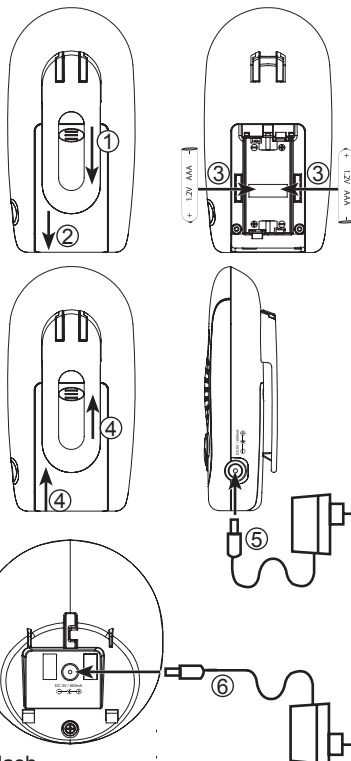


It is recommended to charge the battery pack fully before cordless usage. The rechargeable battery pack of the parent unit takes about 10 hours to charge fully

Baby-unit:

- ⑥ Insert the small plug of the other included power adapters into the underside of the baby unit connector labelled DC 5V. Connect the other end of the power adapter to a 230V electrical outlet. The baby unit is now ready to use.

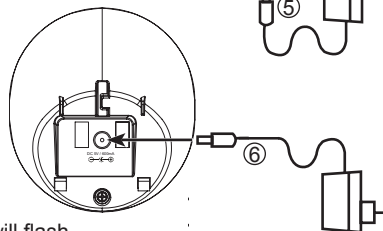

## General Information:

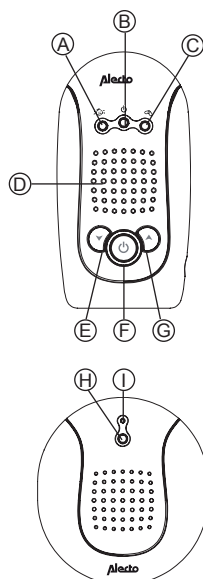

### Ⓐ: Sound light indicator:

Parent unit: The sound light will flash slowly when any sound alert is triggered from the baby unit and fast when more sound is triggered from the baby unit.

Ⓑ: Power light indicator: The power light of the parent unit will go off when the unit is switched off; the light will stay on continuously when the parent unit is switched on; the light will flash every five seconds when charging (whether the parent unit is switched on or off).

Ⓒ: Range light indicator: The Range light indicator will stay on continuously when the parent unit is linked and in the valid range of baby unit. The light will Flash when there no link or out of range of the baby unit.

Ⓓ: Built in speaker

Ⓔ: Volume down button

Ⓕ: On/off button. Press and hold the on/off button for 2 seconds to turn the parent unit on; press and hold for 5 seconds to turn the parent unit off.

Ⓖ: Volume up button

Baby-unit:

Ⓗ: Power light indicator: Light will go on when the power adapter is connected and the baby unit is turned on (the baby unit has no on/off switch).








Ⓘ: Built in microphone

### Using Your Baby Monitor:


- Baby-unit:**
- Place the baby unit in the baby room about 2 feet away from your baby and put the power adapter into a 230V electrical outlet. The power light indicator will come on when the baby unit is switched on.



**WARNING! BE SURE TO SET THE ADAPTER CORD AND THE BABY UNIT WELL AWAY FROM THE BABY'S REACH. ALSO MAKE SURE THAT THE BABY UNIT IS SECURE AND CANNOT FALL INTO THE CRIB!**

- Parent unit:**
- Connect the power adapter to the parent unit or ensure that the batteries are fully charged.
  - Hold the button  down for around 2 seconds; after a few seconds the range-light indicator  will flash and the parent unit will now search for a link with the baby unit; once there is an established link between the parent unit and the baby unit, the range-light indicator  will be on continuously.
  - If the baby unit detects a sound you will be able to hear the sound on the parent unit from the built in loud speaker. The volume of the sound can be set by pressing the button  (softer) or by pressing  (louder); when the minimum or maximum sound is reached a double beep will be heard. It is not possible to turn off the sound.
  - The sound light indicator  will flash slowly when even a small sound alert is triggered from the baby unit; the light will flash faster when more sound is triggered from the baby unit.
  - So long as the parent unit and the baby unit are in range of each other, the range light indicator light  will be on continuously. If the parent unit goes out of reach from the baby unit, or if the baby unit is turned off (power adapter becomes disconnected from the electrical outlet), the range light indicator will flash. If after 20 seconds the contact has not been re-established, then a continuous double beep tone will be triggered as a warning that there is no longer an established link between the parent unit and the baby unit.
  - With fully charged batteries, the parent unit can function for 6-8 hours without needing the power adapter.
  - **PLEASE NOTE:** The DBX-57 has no 'low battery' sound warning signals. Please be sure to check the link by yourself on a regular base.

### General Information:

- Cleaning:**
- Take the power adapter (s) out the electrical outlet and clean the baby monitor with a damp cloth; never use chemical cleaning agents.
- Disposal:**
- Should the baby monitor need to be replaced, please give it back to your supplier as they know how to dispose of it in an environmentally friendly manner. Dispose of the battery pack in an environmentally-friendly manner according to your local regulations. 
- Specifications:**
- The range of the link inside the house is 50m and outside the house is 300m.
  - Power of the baby unit: 5VDC from the power adapter (5E-AD050060-E)
  - Power of the Parent unit: 5VDC from the power adapter (5E-AD050060-E) or from the 2 rechargeable batteries (1.2V, 600mAh or more, AAA, NiMH).
  - Operating of the parent unit battery: Is up to 6 to 8 hours (depending on the use of the baby monitor and the condition of the batteries).
  - Charging time of the parent unit battery: 10 hours (from an empty battery)
  - Frequency: 2.4GHz (this frequency is allowed in all EU countries. In France, Italy, Russia and the Ukraine only indoor usage is allowed).
  - The declaration of conformity? Is available through the website [WWW.ALECTO.INFO](http://WWW.ALECTO.INFO)
  - This product has a warranty of 24 months.



Service			<b>WWW.ALECTO.INFO</b> <b>SERVICE@ALECTO.NL</b>	<b>Alecto®</b>
			<b>NL 073 6411 355</b> (Lokaal tarief)	
			<b>BE 03 238 5666</b> (Lokaal tarief) (Tarif local)	
			<b>DE 0180 503 0085</b> (Lokale Festnetzkosten)	
Help			<b>Hesdo, Australiëlaan 1, 5232 BB, 's-Hertogenbosch, The Netherlands</b>	

V2.0

